

**UNRIVALLED HYDRAULIC PERFORMANCE**

- A modern, optimised design **for optimum hydraulic efficiency**
- **Higher delivery rate for lower energy consumption**
- **Proven reliability and durability** thanks to the polypropylene fiberglass reinforced wet end
- **Easy maintenance:** twist-lock cover + extra wide strainer basket for less frequent cleaning
- Recommended for pools **up to 195 m<sup>3</sup>\***

\* Calculation based on 6 hours turnover





Easy-to-service design provides simple installation and maintenance




Drain plugs for an easy wintering



See-through strainer cover

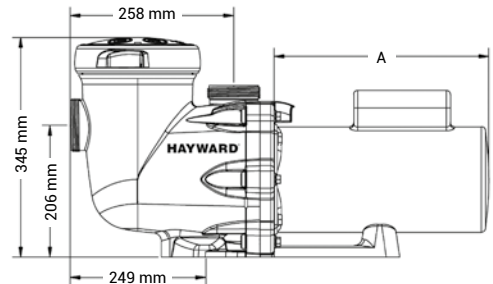

Pressure (mbar)

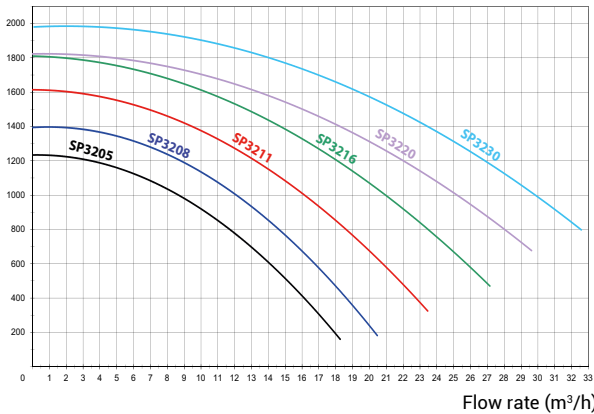

**Technical Specifications**

Max. water temp.	35°C
Mechanical seal	AISI 304, suitable for salt water
Motor specifications	Class F, IP55, 50Hz, 2 Poles
Housing/impeller/strainer/lid	PP+GF/Noryl® + GF/ABS/PC

	Type	Dim A	Weight	I/O	Flow rate*	Input Power P1	Output Power P2	Amperage	Item
<b>SINGLE PHASE TRISTAR®</b>	1/2 HP	220 mm	14 kg	63 mm	11.4 m³/h	640 W	430 W	3 A	SP32051
	3/4 HP	220 mm	14 kg	63 mm	14.5 m³/h	640 W	430 W	3 A	SP32081
	1 HP	247 mm	14 kg	63 mm	18.5 m³/h	975 W	720 W	4.3 A	SP32111
	1.5 HP	247 mm	15 kg	63 mm	23.5 m³/h	1 100 W	790 W	5 A	SP32161
	2 HP	265 mm	17 kg	63 mm	28 m³/h	1 500 W	1 160 W	7.25 A	SP32201
	3 HP	316 mm	17 kg	63 mm	32.5 m³/h	2 200 W	1680 W	9 A	SP32301
<b>THREE PHASE TRISTAR®</b>	2 HP	247 mm	15 kg	63 mm	28 m³/h	1 330 W	1 100 W	4/2.3 A	SP32203
	3 HP	265 mm	17 kg	63 mm	32.5 m³/h	1 770 W	1 500 W	5.5/3.2 A	SP32303

\* under 8 m water column pressure